

Radio

Odense AR 28

Operating instructions



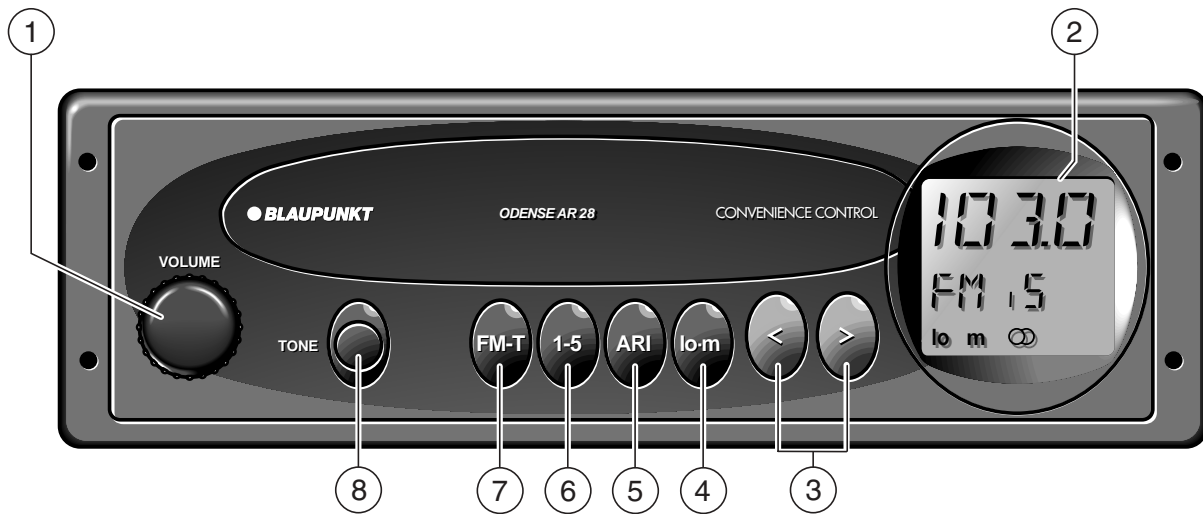


Table of Contents

Important information	10
Traffic safety	10
Installation / Hook-up	10
Radio operation	10
Station search	10
Manual station search	10
Adjusting station search sensitivity for FM	10
Stereo - mono switch	10
Storing stations	11
Storing the strongest stations automatically	11
Recalling stored stations	11
Traffic messages (ARI)	11
Appendix	12
Technical data	12

Legend

- ① **On/off**
Turn knob.


On ↻

Off ↻

Adjust volume:

Turn knob.

- ② **Display for**

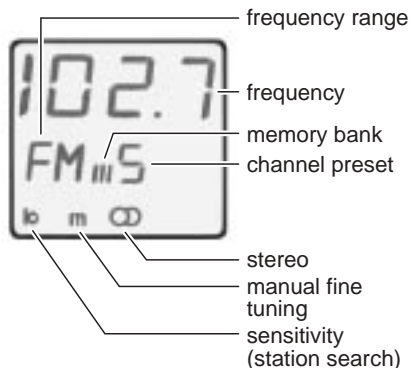

- ③ **<>**

Station selection

automatic or manual ("m" in display).

Switch over by pressing **lo • m** ④

- ④ **lo • m**

Changing the search tuning sensitivity for FM stations

lo lit up in the display indicates normal sensitivity for the station search function.

lo not lit up in the display indicates high sensitivity for the station search function.

m lit up indicates manual station fine tuning.

To change: Press button briefly.

Added feature:

Switch over from stereo to mono:

Press **lo • m** for longer than 2 seconds and release.

- ⑤ **ARI** (traffic messages)

When ARI is visible in the display, you are able to tune into only those radio stations which broadcast traffic messages.

- ⑥ **1-5**

For storing and recalling radio stations

- ⑦ **FM•T** (frequency modulation)

Switch for the FM memory banks I, II, III and "T" (Travelstore) - for storing and recalling the six nearest, strongest station signals.

Store "T":

Press **FM•T** until the search begins in the display.

Recall "T":

Press **FM•T** until T appears in the display. Then press the station button quickly and repeatedly if necessary.

- ⑧ **TONE**

Adjust tone.

↻ more bass

↻ more treble

Important information

Traffic safety

As the driver of a motor vehicle, it is your responsibility to pay attention to the traffic situation at all times. Never use your car radio in a way that could distract you. Should the traffic situation become particularly demanding, we would advise you not to use the radio. Please keep in mind that you travel a distance of 14 m per second at a speed of only 50 km/h. When adjusting the volume, make sure that you are still able to hear sounds coming from outside of the vehicle, so that you are always able to react to warning signals.

Installation / Hook-up

If you would like to install your new car radio yourself or add other audio components to the existing ones, then please read the enclosed instructions on installation and hook-up carefully.

Do not ground the loudspeaker outputs!

Use only Blaupunkt-certified accessories and spare parts.

Radio operation

With this car radio you can receive FM frequencies ranging from 87.5 to 108 MHz.

Station search

m should not be lit up in the display. If it is, switch it off by pressing **lo • m**

- **< >** press right or left.
The car radio will automatically tune into the next station.

If you hold the button pressed, the search function will forward quickly.

Manual station search

m (manual) must be lit up in the display. If it is not, switch it on by pressing **lo • m**.

- **< >** press right or left quickly.
The frequency will move up or down in short intervals.

If you hold the button pressed, then the frequencies will move up or down more quickly.


Adjusting station search sensitivity for FM

You can adjust the sensitivity of the automatic station search.

- Press **lo • m**.
When “lo” is visible in the display, then only those stations with relatively strong signals will be picked up (low sensitivity).
When “lo” is not visible in the display, then stations with weaker signals will also be picked up (high sensitivity).

Stereo - mono switch

If you would like to switch between stereo and mono reception:

- Press **lo • m** for approximately 2 seconds and release.
During mono reception the stereo symbol  will disappear from the display.

Each time the car radio is switched on, the reception will automatically be set to stereo. The radio will automatically switch to mono when the reception conditions are poor.

Traffic messages (ARI)

Storing stations

For each memory bank (I, II, III, T) you can store up to five stations using the button **1-5**.

- For FM select the memory bank by pressing **FM•T**.
- Select the button **1-5** to store the new station and press it.
- Press **< >** to tune in the station you want to store (automatically or manually).
- Press the button **1-5** and hold it. First the station will be muted and then become audible again.

The station has been stored in the memory bank.

The corresponding memory bank and the button preset will appear in the display.

Note:

If you tune into a station which has already been stored, then the corresponding button preset and the memory bank will flash in the display for approximately 5 seconds.

Storing the strongest stations automatically

(Travelstore)

In your reception area you can automatically store the five nearest FM stations, sorted according to their frequencies.

This feature is particularly useful when you are travelling.

- Press **FM•T** for at least 2 seconds. The radio will search for the nearest FM stations and store them in the memory bank "T" (Travelstore). When the process has been completed, the first station will be set.

If you wish, you can also store stations in the Travelstore memory bank manually.

Recalling stored stations

You can recall the stored stations by pressing the corresponding buttons.

- Select the memory bank. Press **FM•T** until I, II, III or T appears in the display.
- Select the station by pressing the button **1-5**, press repeatedly if necessary.

Many FM stations broadcast traffic news for their reception area at regular intervals. Stations using the ARI system broadcast an "ARI signal" during their programmes, so that your car radio can recognize them. Another signal is broadcast to indicate the beginning and end of a traffic message. These traffic messages are broadcast at a preset volume. If you are playing a cassette, it will be interrupted until the traffic message has ended and will then resume operation.

Switching the traffic messages (ARI) on and off

If you want to switch the reception of traffic messages (ARI) on or off

- Press **ARI**.
ARI will light up in the display, when the reception is switched on.

Now the radio will only pick up those stations broadcasting the ARI signal.

Warning beep

Should you leave the reception area of the station you are tuned to, then you will hear a warning beep after approximately 30 seconds. If you should press a button preset for a station which does not broadcast the ARI signal, then you will also hear a warning beep.

Appendix

Switching the warning beep off

- a) Tune to a different station broadcasting the ARI signal:
- Press < > or
 - select a stored station with the ARI signal by pressing the button preset **1-5**.
- or
- b) Switch the traffic message priority off:
- Press **ARI**.

Technical data

Amplifier:







Output power: 2 x 5.5 W RMS power according to DIN 45324/3.1 at 4 Ω

FM:

Sensitivity: 1.3 μ V at 26 dB S/N ratio

Response: 35 - 15 000 Hz (-3 dB)

Information subject to change!

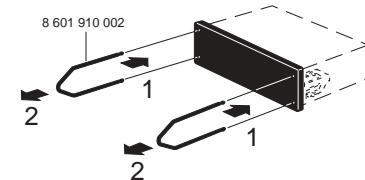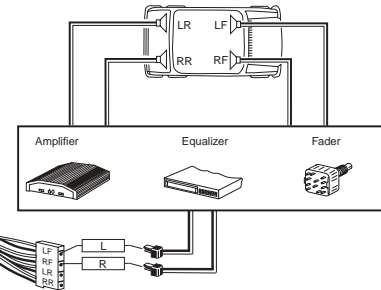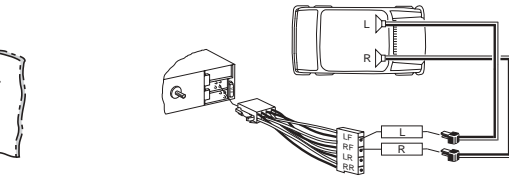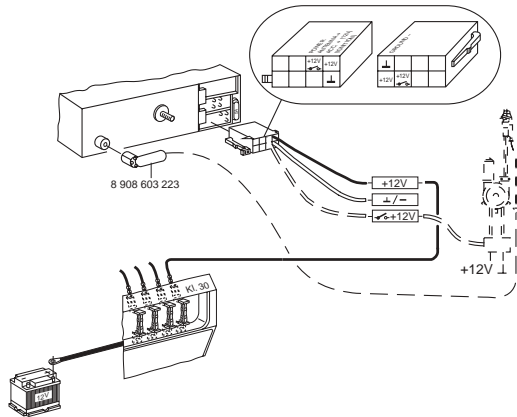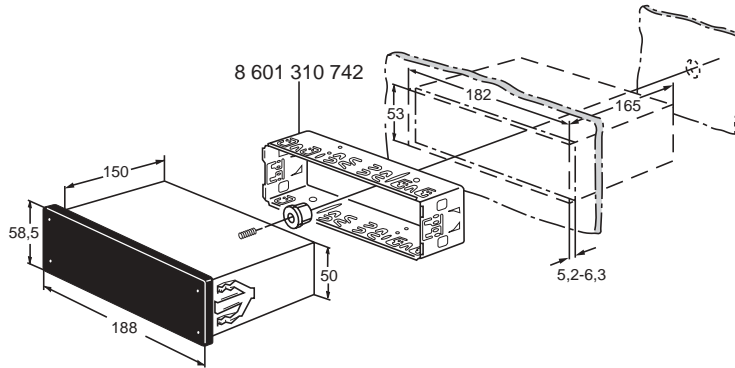

Blaupunkt-Werke GmbH
Bosch Gruppe

K7/VKD 8 622 401 404

