


RADAR ALARM GUARD **ISD-RG1200**



How to use the ISD-RG1200:

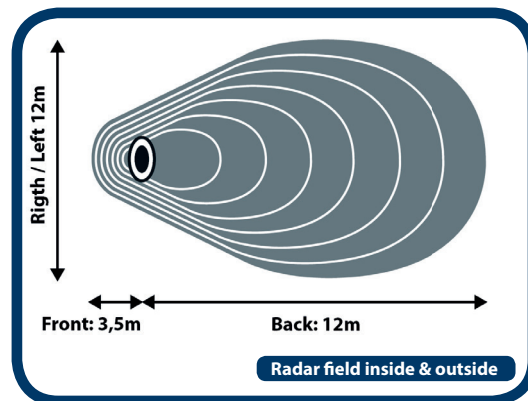

Features:



Product Features:

- The Blaupunkt ISD-RG1200 has a in-built 360° radar field which detects possible intruders through doors, windows and even through walls.
- Powerfull, adjustable in-built siren 100 dB
- Arm mode acoustic countdown timer
- 5 alarm sounds: 3x sirens / Door bell / Dog bark
- 3D speaker effect: Realistic dog bark sound
- 2 Remote controls included. Range distance 50m.
- Optional battery power supply for best flexibility
- Radar detection range (open area). 0 – 15 m (rear), 0 – 3,5 m (front), 0 – 7 m (side)

Technical Data:

ISD-RG1200:

- Input voltage / current 12 V/DC, 1 A via power adapter
- Backup battery 8 x 1.5 V battery type AA (Not included)
- Standby current consumption ≤ 7 mA
- Alarm current consumption ≤ 500 mA
- Noise level range ≤ 100 dB
- Transmission frequency/power 5.8 GHz, 1 mW
- Radar detection angle 360°
- Operating conditions 0 to +40 °C, 20 % – 85 % RH
- Storage conditions 0 to +40 °C, 20 % – 50 % RH
- Dimensions (W x H x D) 154 x 160 x 110 m
- Weight Approx. 820 g

Remote control:

- Operating voltage 1 x 3 V button cell, type CR2032
- Transmission frequency/power 433 MHz, 0.1 mW